

MOBILE

PARTNER

CE 0082 EN 12278: 2007 individually tested

Pulley
Poulie

MOBILE

PARTNER







$7 < \varnothing < 13 \text{ mm}$

$7 < \varnothing < 11 \text{ mm}$
UIAA

1. Field of application (text part) Champ d'application (partie texte)

2. Nomenclature Nomenclature



3. Inspection, points to verify Contrôle, points à vérifier

PPE checking
Vérification EPI
PETZL.COM

Traceability and markings Traçabilité et marquage

MOBILE

PARTNER

CE 0082

a. Body controlling the manufacture of this PPE

b. Notified body that carried out the EU type inspection

APAVE SUDEUROPE SAS
8 rue Jean-Jacques Vermezza
Z.A.C. Saumaty-Séon - CS 60193
13322 Marseille CEDEX 16
N°0082

c. Traceability: **datamatrix**

d. Diameter

e. Individual number
YY M 0000000 000

f. Year of manufacture

g. Month of manufacture

h. Batch number

i. Individual identifier

j. Standards

k. Carefully read the instructions for use

l. Manufacturer address


4. Compatibility (text part) Compatibilité (partie texte)

5. Strength Résistance

5A. Working load limit / Valeur d'utilisation maxi


5B. Breaking load / Charge de rupture

6A. Simple pulley system

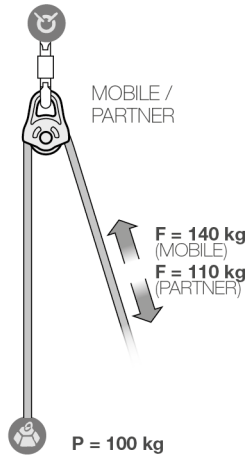


	MOBILE	PARTNER
Theoretical force	$F = P$	$F = P$
	$F = 1,4 P$	$F = 1,1 P$
	$F = 2 P$	$F = 2 P$

with progress capture

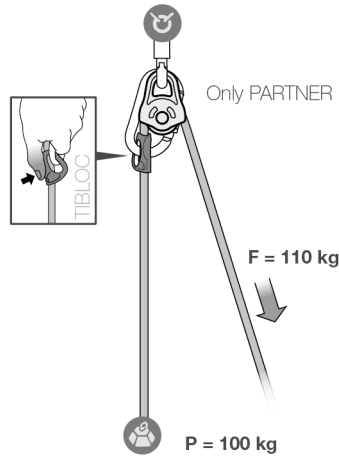


Theoretical force	$F = P$
	$F = 1,1 P$
	$F = 2 P$

6B. 2:1 hauling system

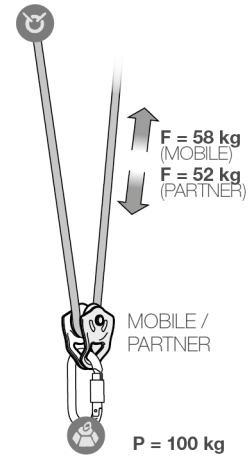


	MOBILE	PARTNER
Theoretical force	$F = 0,5 P$	$F = 0,5 P$
	$F = 0,58 P$	$F = 0,52 P$
	$F = 0,66 P$	$F = 0,66 P$



6C. 3:1 hauling system with progress capture

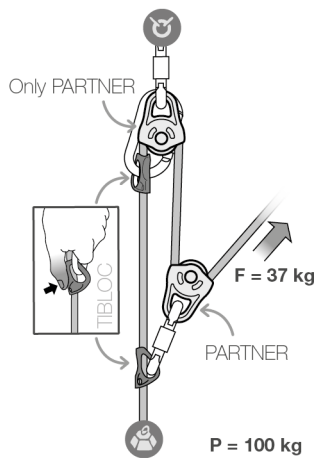

Theoretical force	$F = 0,33 P$
	$F = 0,37 P$
	$F = 0,57 P$

7. Progress capture systems
Systèmes anti-retour

 **Occasional use**
Utilisation occasionnelle
TIBLOC PARTNER

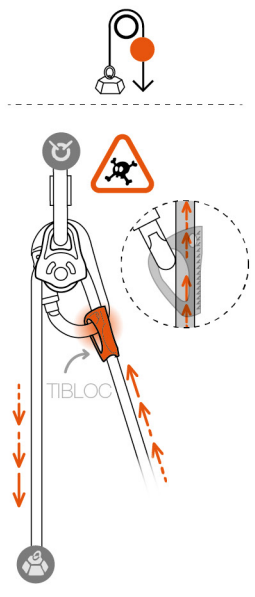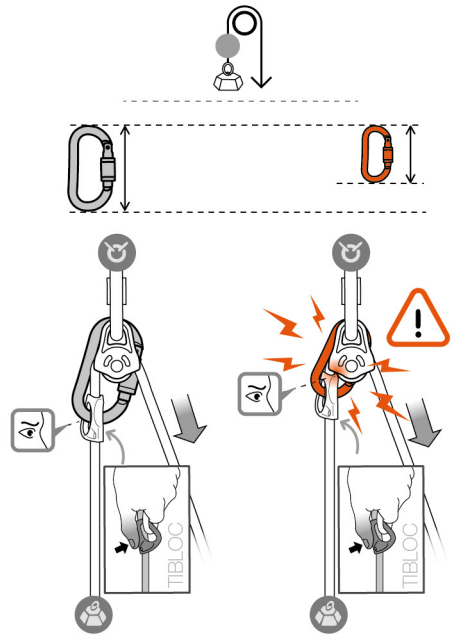

8. Positioning and redirection
Positionnement et renvoi

